
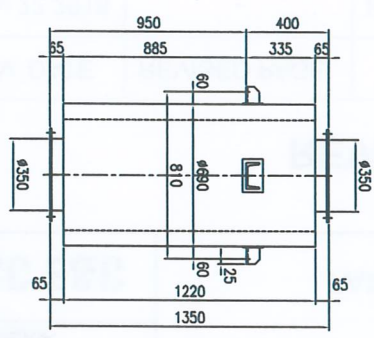
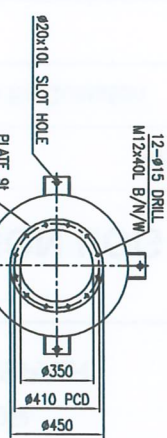
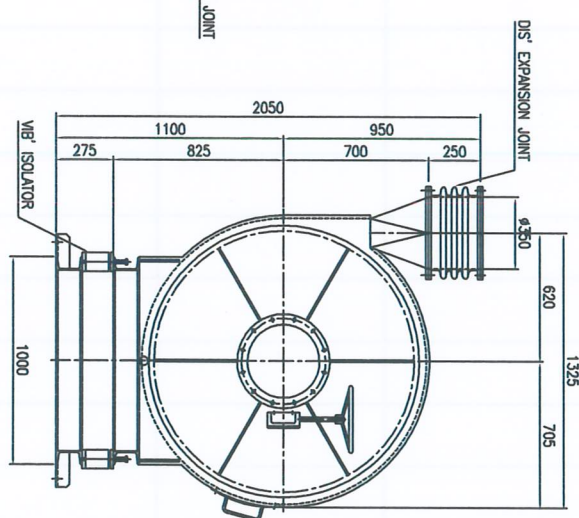
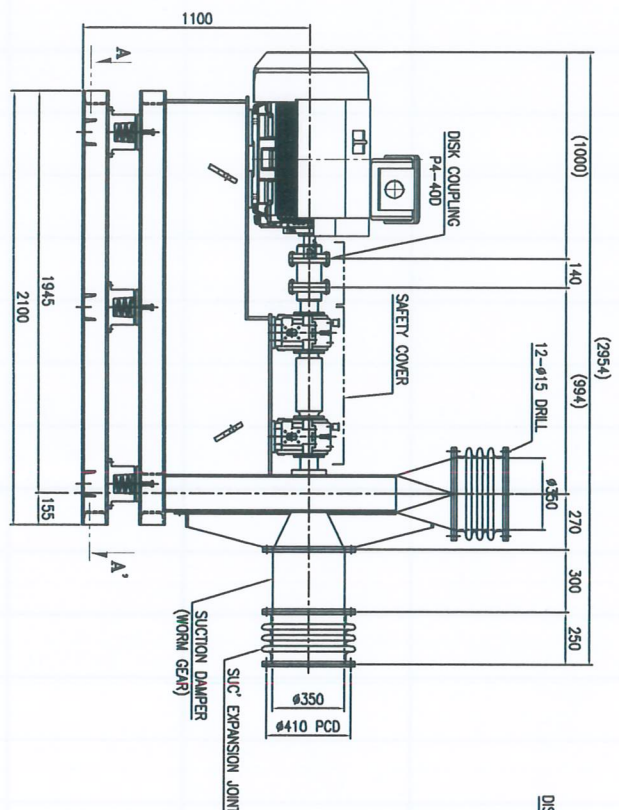


TURBO FAN (STF-7.5H-C)									
TYPE	100			1700			mmHg		
AIR VOLUME	2970			DESIGN TEMP.			20 °C		
REVOLUTION	GAS COMPOSITION			AIR 20 °C					
DRIVER	75 kW	380 v	50 Hz	3 ph	2 pole				
BEARING	2970 rpm		TEFC, VWF type	IMPELLER		HYDROSLING			
	No. #4218 C3		METHOD OF COOLING		LUBRICATION				
ACCESSORIES	SUCKING		EXP. JOINT		EXP. JOINT		OIL		
	SUCKING DIAPHR.		1 SET		DISCHARGE SILVER		1 SET		
MATERIAL	CASING		SS400		SHAFT		SUS4C		
	IMPELLER		HT60						
NET WEIGHT	FAN + SH.		DRIVER		TOTAL				
INSTALLATION	1450 + 150 kg		680 kg		2290 kg				
☐ IN DOOR ☒ OUT DOOR									

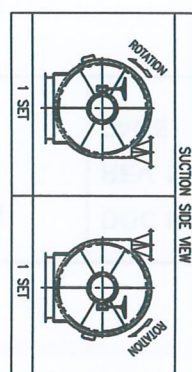

Discharge Silencer

FOR APPROVAL

CLIENT										엔비온										TITLE																																																																					
PROJECT										수택크앤지니아릴 베트남										 SAMWON E & B CO., LTD.																																																																					
APPROVED										S.K.LIM										DATE										2019.03.22										QTY										DRAWING NO.										PROJECTION																													
CHECKED										C.W.KIM										SCALE										1 / 25										2										TH17SSCA0																																							
DRAWN										J.G.CHOI										MFG. NO.										219064-001~2																																																											
△																																																																																									
△																																																																																									
△																																																																																									
REV.										DATE										REVISIONS & DESCRIPTION										DRAWN										APPROVED																																																	