PORA
THE BEST QUALITY AND TRUST

PR-BM Type

Motor Actuator


Prompt and accurate control can be achieved by using a motor. It is operated by electricity and can be used without difficulty as there is no possibility of oil leakage unlike a hydraulic type.



※ The content of this leaflet may be changed without prior notice, for which we request your kind understanding.

·PORA Electric Machinery Co., Ltd ·Head Office: 13, LS-ro 166beon-gil, Gunpo-si, Gyeonggi-do ·Tel: +82-31-455-8183 ·Fax: +82-31-457-8183 ·Hompage: www.pora.com

DIMENSION

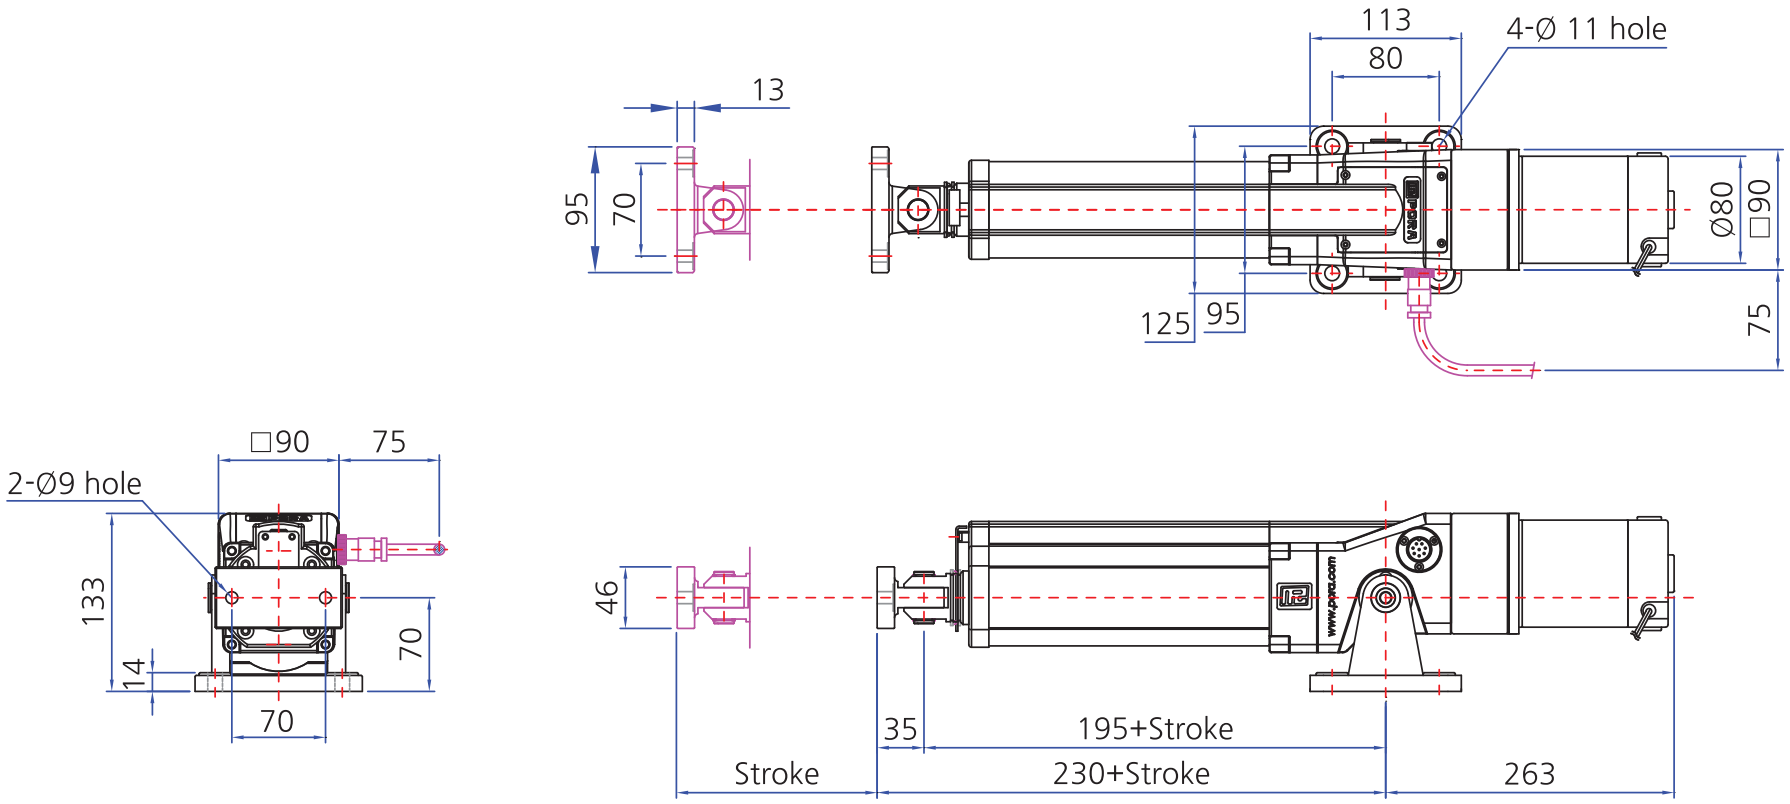

SPECIFICATIONS

Product Name	PR-BM Type								
Motor Capacity(W)	40			60			90		
Gear Ratio	6:1	10:1	18:1	6:1	10:1	18:1	6:1	10:1	18:1
Thrust(kgf)	60	95	200	95	150	300	140	230	450
Speed(mm/s)	40	25	12	40	25	12	40	25	12
Stroke(mm)	150, 200 (*300, 400 are custom-made.)								
Controllers to which this item is applied	PR-DPA-100.A, PR-DPA-100L.A, PR-DPA-200								
Weight	12.5kg								

Basic specification

※As to special specification other than above standard product, consult with us over phone.